



**McCue**

[mccue.com](http://mccue.com)



[cservices@mccue.com](mailto:cservices@mccue.com)




# COLUMN *PROTECTOR*

**STRONG, LOW-PROFILE PROTECTION  
THAT KEEPS YOUR FACILITY SAFE**



**ENGINEERED FOR STRENGTH:**  
Designed to withstand heavy impacts, so your columns don't have to.

10,000 lb (4536 kg) Forklift  
Traveling at 6.95 mph (11.2 km/h)

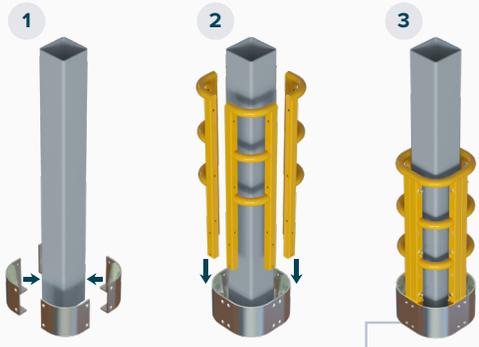

**ADAPTABLE DESIGN:**  
Interlocking components allow for easy customization to protect any space.

Prevents Fork Intrusions



**MINIMAL SPACE. MAXIMUM PROTECTION:**  
Strong protection in a compact design, making the most of your available space.





# COLUMN PROTECTOR

Meet **Column Protector**, your total safety solution to protect your facility, equipment and drivers from accidental impacts. Keep the structural integrity of your facility intact and your people safe – because nothing slows down productivity like hitting a one-ton steel column.

## ADAPTABLE FOR ANY SPACE

Experience the versatility of **Column Protector**, designed to easily adapt to meet your safety needs. This modular system can be customized to fit your space while providing unmatched protection.


**AVAILABLE COMPONENTS:**  
Modular parts allow you to customize **Column Protector** to fit any space.

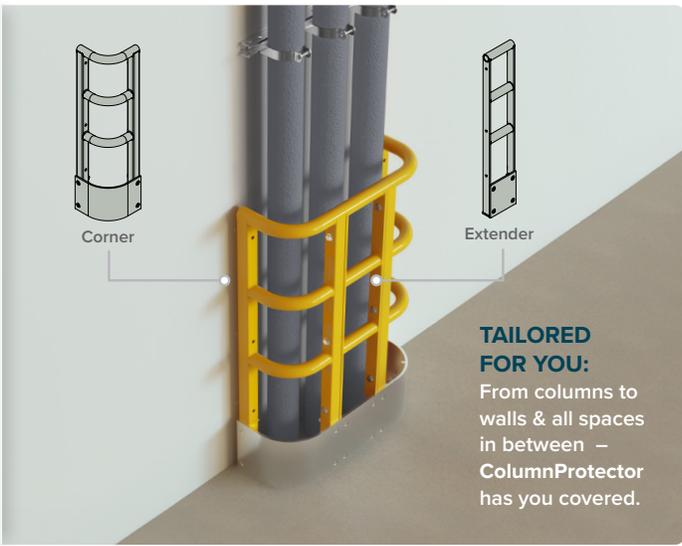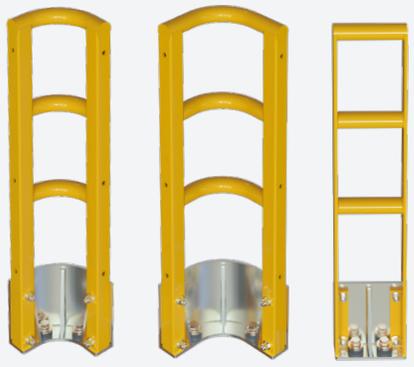

**TAILORED FOR YOU:**  
From columns to walls & all spaces in between – **Column Protector** has you covered.

## IMPACT TESTING

Rigorous product testing at the highest standard.

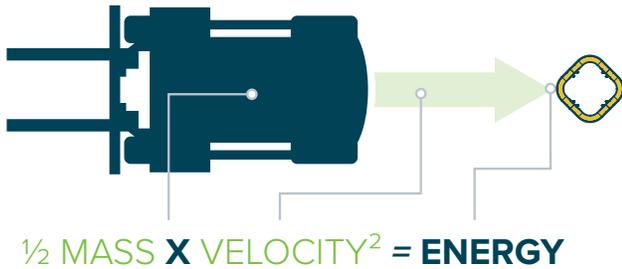


**Ultimate Strength Rating**  
**16,153 ft-lbs (21,904 J)**

 **x** 

**8710 lbs (3950 kg)**      **7.45 mph (12.0 kmh)**

<b>90°</b>	<b>16,153 ft-lbs</b>	<b>21,904 J</b>
------------	----------------------	-----------------

<b>45°</b>	<b>32,306 ft-lbs</b>	<b>43,807 J</b>
------------	----------------------	-----------------

<b>30°</b>	<b>64,613 ft-lbs</b>	<b>87,615 J</b>
------------	----------------------	-----------------

### WHAT DOES 16,153 FT LBS (21,904 J) MEAN TO YOU?




## MATERIAL PROPERTIES

**BARRIER DEFLECTION:** Limited deflection and maximum energy absorption.



### Anchor Specifications:

A shock-absorbing anchor system protects both the anchors and the floor.

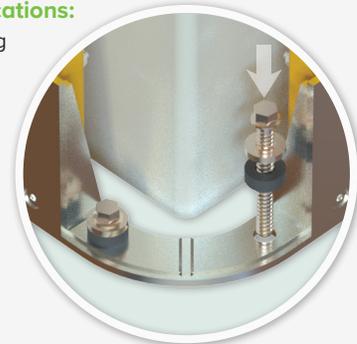

	<b>Working Temperatures</b>	<b>-20°F–392°F (-29°C–200°C)</b>
	<b>Toxicity</b>	<b>Not Hazardous</b>

	<b>Flammability</b>	<b>Does Not Easily Ignite</b>
	<b>REACH / RSCA / DSL</b>	<b>Compliant</b>




# COLUMN PROTECTOR

## Column Protector 8

Part #: CPR-K-0808-307

Includes:  
 (4) 8" Column Protector corners,  
 hardware & anchors

Lead time: 12-14 weeks.

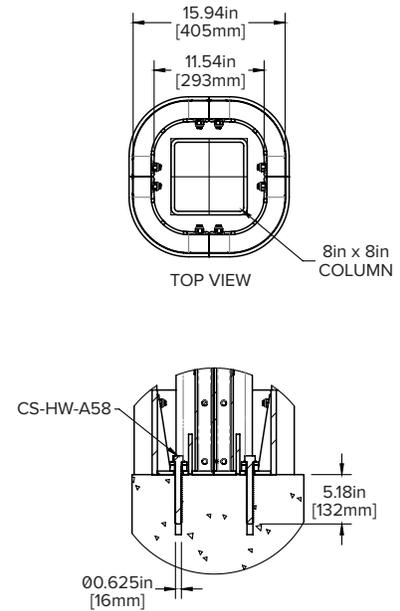
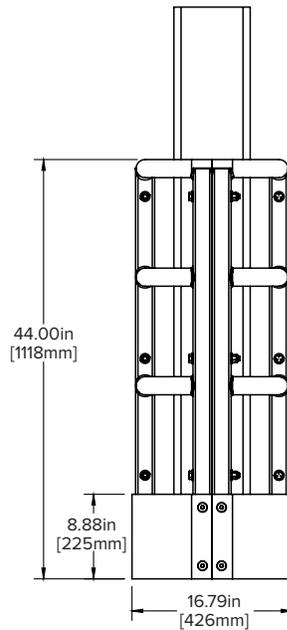
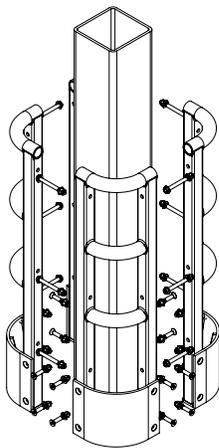


## Column Protector 12

Part #: CPR-K-1212-307

Includes:  
 (4) 12" Column Protector corners,  
 hardware & anchors

Lead time: 12-14 weeks.

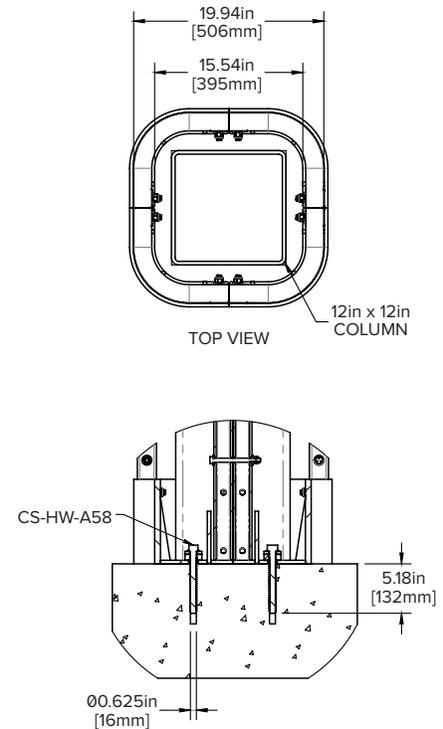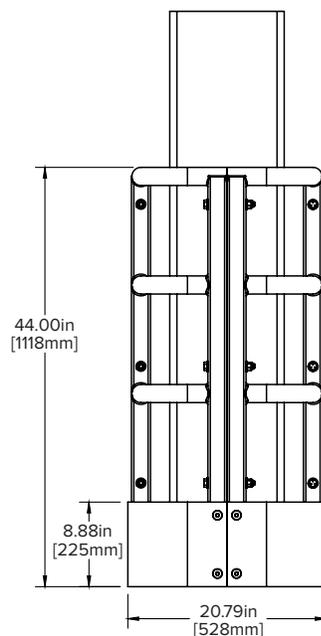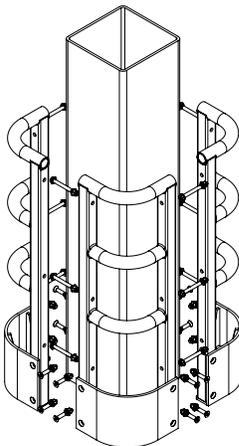


## COLUMN PROTECTOR

### Column Protector 8 Extender

Part #: CPR-K-E08-307


Includes:  
 (1) Extender insert, hardware & anchors

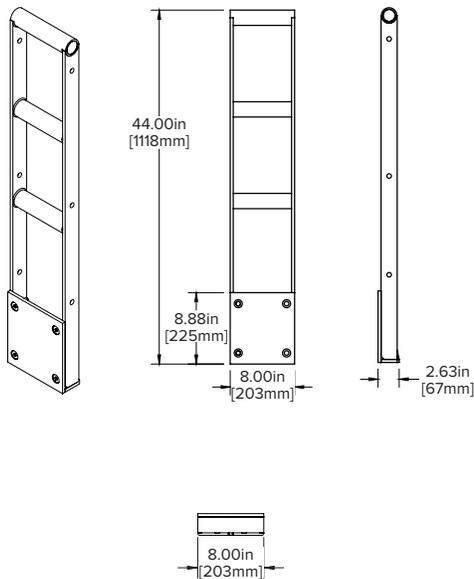

### Column Protector 8 Corner

Part #: CPR-K-C08-307


Includes: (1) Corner insert, hardware & anchors

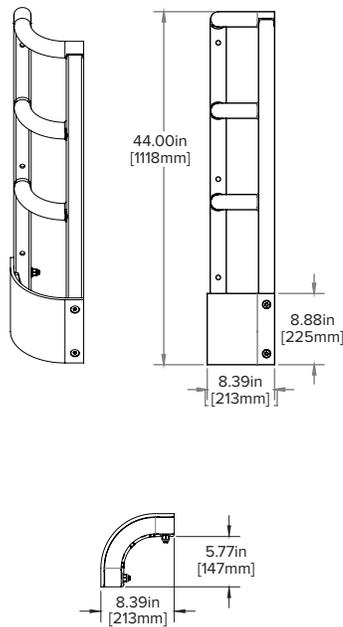

### Column Protector 12 Corner


Part #: CPR-K-C12-307

Includes: (1) Corner insert, hardware & anchors

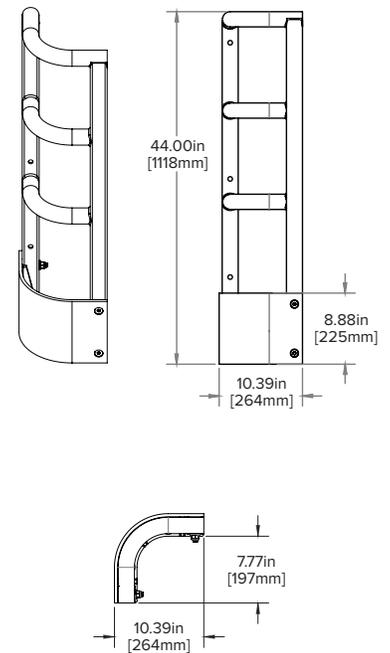


### Custom Order Examples

For a 12" x 16" column, order:

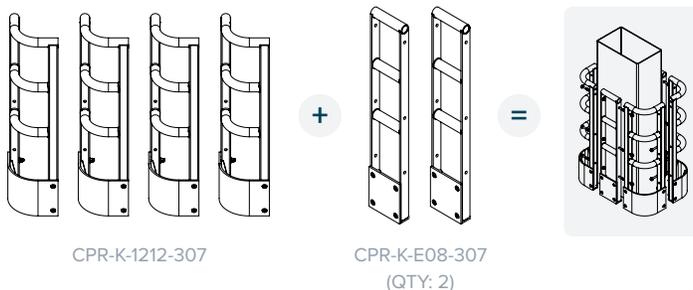

For 12" x 20" wall protection, order:

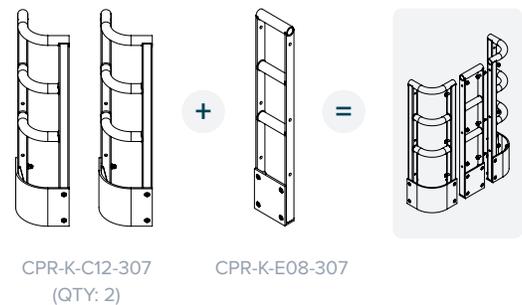

Please reference our [Buyers Guide Customer Drawing](#) for more information!