
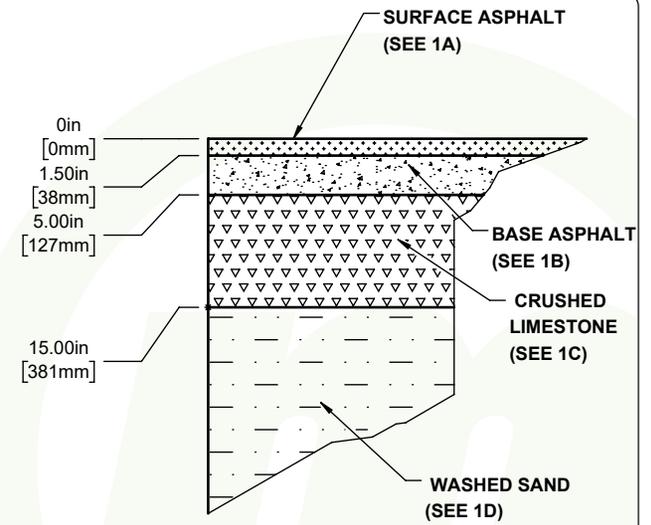
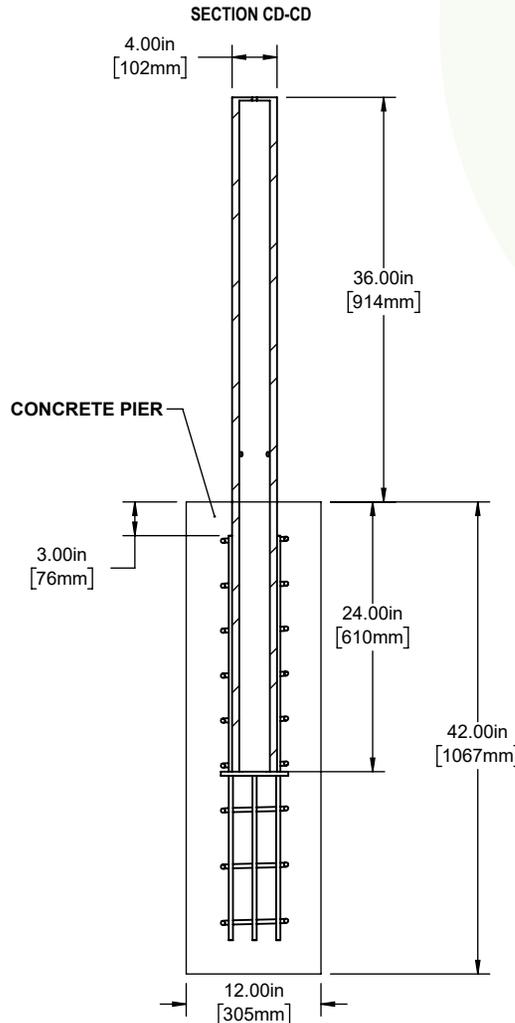
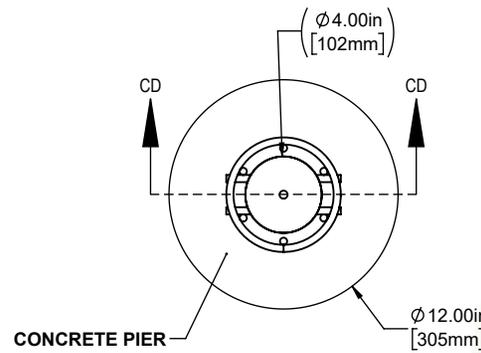


**COVER OPTIONS**

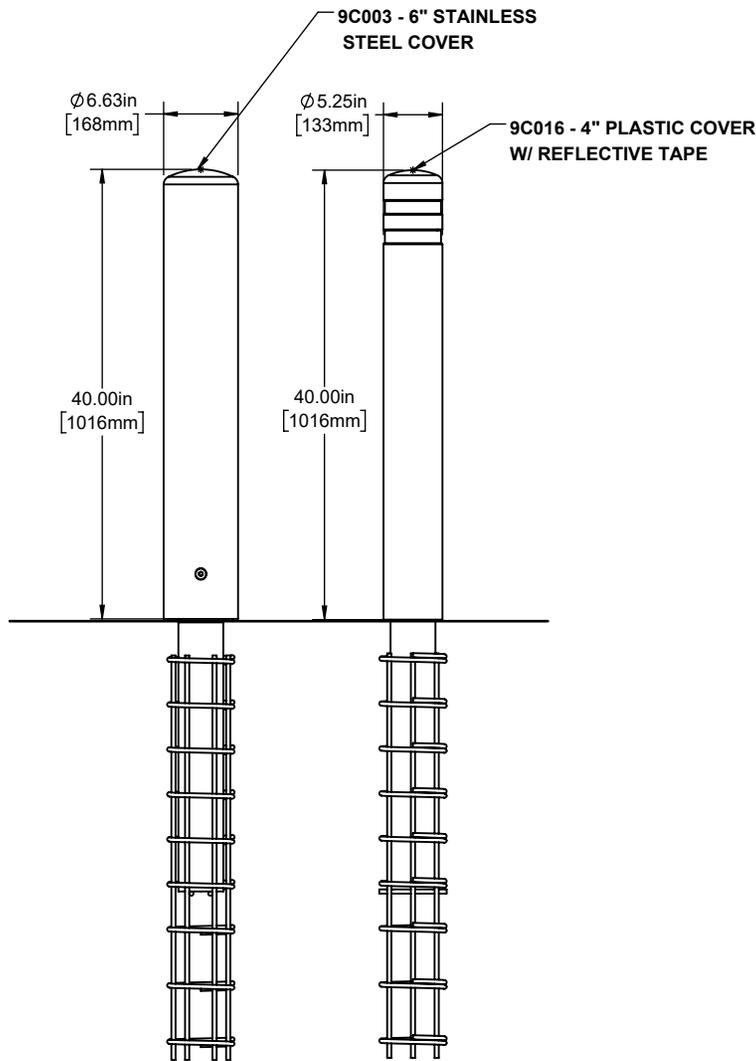

**MINIMUM GROUND CONDITIONS REQUIRED**

- 1a: The surface asphalt is TxDOT type D surface asphalt.
- 1b: The asphalt base is TxDOT type B base asphalt.
- 1c: The base is Type A Grade 1 crushed limestone road base, compacted to 90% of standard proctor density.
- 1d: The washed sand shall be classified as SP - poorly graded sand & be compacted to a density of not less than 90% maximum dry density in accordance with AASHTO Method of Test T099.

**Customer Drawing**  
**CRASHCORE S15 ASPHALT**



**McCue**

**McCue US**  
 (978) 741-8500  
 CustomerCare@mccue.com

**McCue UK**  
 +44 1908-365-511  
 UKCServices@mccue.com

**McCue China**  
 +86-592-2200 790  
 ChinaOffice@mccue.com

[mccue.com](http://mccue.com)